

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
5 January 2006 (05.01.2006)

PCT

(10) International Publication Number
WO 2006/000800 A1

(51) International Patent Classification⁷: B60R 21/16,
21/20

(21) International Application Number:
PCT/GB2005/002507

(22) International Filing Date: 27 June 2005 (27 06 2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2004 190953 29 June 2004 (29 06 2004) JP

(71) Applicant (for all designated States except US): NISSAN
MOTOR CO., LTD [JP/JP], 2, Takara cho, Kanagawa ku,
Yokohama shi, Kanagawa 221 0023 (JP)

(71) Applicant (for MG only): NISSAN TECHNICAL CEN-
TRE EUROPE LTD [GB/GB], Cranfield Technology
Park, Bedfordshire MK43 ODB (GB)

(72) Inventor; and

(75) Inventor/Applicant (for US only): SUNABASHIRI,
Yukisada [JP/JP], Nissan Motor Co., Ltd., 2, Takara cho,
Kanagawa ku, Yokohama shi, Kanagawa 221 0023 (JP)

(74) Agent: HOLMES, Matthew, William, Intellectual
Property Department, Nissan Technical Centre Europe
Ltd, Cranfield Technology Park, Bedfordshire MK43 ODB
(GB)


(81) Designated States (unless otherwise indicated for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA,
MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ,
OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL,
SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC,
VN, YU, ZA, ZM, ZW

(84) Designated States (unless otherwise indicated for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,
SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN,
GQ, GW, ML, MR, NE, SN, TD, TG)

Published:
— with international search report

[Continued on next page]

(54) Title: AIRBAG APPARATUS

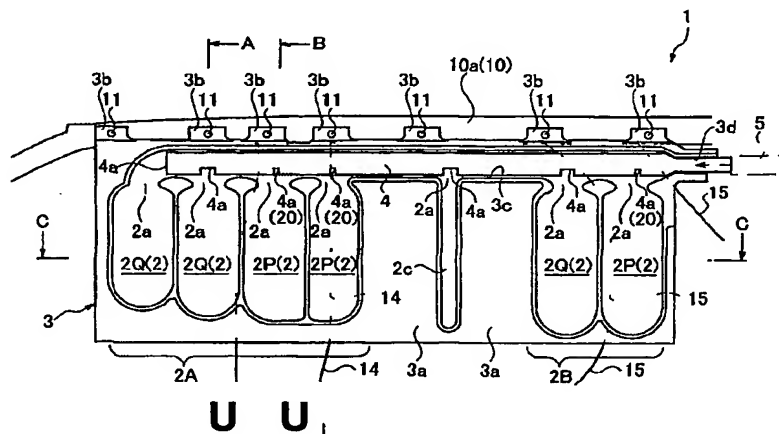

(57) Abstract: An air bag apparatus (1) for installation along the front to rear axis of the interior facing side roof rail (10a) of a motor vehicle. The air bag comprises an air bag body (3), an inflator means (5) which is in fluid communication with the air bag body (3), and a fluid supply delay means (20). The air bag body (3) comprises a plurality of inflatable chambers (2) comprising at least one specific chamber (2P) and at least one general chamber (2Q), wherein when in the deployed state the at least one specific chamber (2P) is positioned adjacent to a structural pillar member (14,15) of a vehicle, side portion (13) of the vehicle body and wherein when in the deployed state the at least one general chamber (2Q) is located adjacent to a side wall of the vehicle side portion (13). In use, the inflator means (5) supplies a high pressure fluid to the air bag body (3) thereby inflating each of the plurality of chambers (2) and the fluid supply delay means (20) selectively delays the supply of the high pressure fluid to the at least one specific chamber (2P) relative to the at least one general chamber (2Q).

WO 2006/000800 A1

WO 2006/000800 A1



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.